



E14-1CM & CN Series

Ordering Informations

Model no.	Casing	Color	Size	Light Source	Luminous Intensit y
E14-1CMWW5W	Silver	Warm White (2600-2800K)	Ø34 x 131m m	5W	120-160lm
E14-1CMWE5W	Silver	Cool White (6,000-6,500K)	Ø34 x 131m m	5W	140-170lm
E14-1CNWW5W	Gold	Warm Whit e (2600-2800K)	Ø34 x 131m m	5W	120-160lm
E14-1CNW5W	Gold	Cool White (6,000-6,500K)	Ø34 x 131m m	5W	140-170lm

Outline Drawing



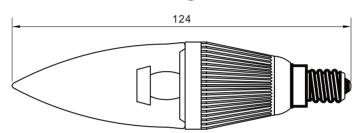

Features

- Ceramic casing
- Dimmable control*
- Easy installation and replacement
- Eco-friendly product
- Long life time
- Low power consumption
- No UV or IR damage light sensitive items
- Low surface heat against hand touch
- Highly efficient heat release mechanism

Unit: mm

Specifications

Paramete r	Rating value		
Power Consumption	5W		
Input Voltag e	AC 85-260V, 50/60Hz		
Light Source	Cree		
Operating Temperature	-40 to +70° C		
Beam Angle	45°		
Weight	80g		
CRI	80		

Warning:

- * Do not look permanently to the light sources
- * Specified performance measured in AC 85-260V
- * Dimmable control only by Eco-lamps dimmer



^{*} The dimensional outline drawings ar e common in (E14-1CM/NWW3W and E14-1CM/NWE3W)