


MR16-3AM Series

Ordering Informations

Model No.	Color	Size	Light Source	Luminous Intensity
MR16-3AMWW6W	Warm White (3,000-3,500K)	Ø50.0 x 110.0mm	3x2W	350-450lm
MR16-3AMWE6W	Cool White (6,000-6,500K)	Ø50.0 x 110.0mm	3x2W	400-500lm

Outline Drawing

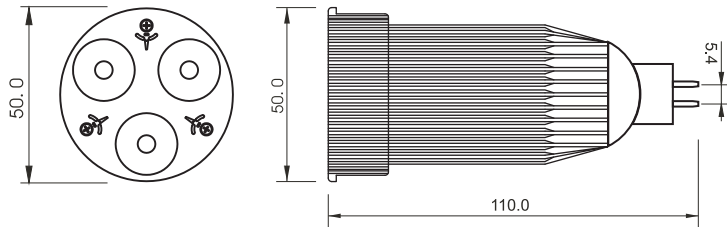

* The dimensional outline drawings are common in (MR16-3AMWW6W and MR16-3AMWE6W)

Unit: mm

Features

- Aluminum casing with special extrusions design
- Energy saving
- Eco-friendly product
- Long life time (up to 50,000hours)
- High luminance
- Low power consumption
- RoHS compliant
- Low surface heat against hand touch
- No UV or IR damage light sensitive items
- Highly efficient heat release mechanism

Specifications

Parameter	Rating value	Unit
Size	Ø50.0 x 110.0mm	mm
Power Consumption	6	W
Input Voltage	AC/DC 12V, 50/60Hz	V
Installation Diameter	55	mm
Light Source	3 x 2W power LED	
Operating Temperature	-40 to +70°C	°C
Beam Angle (Adjustable tilt)	30°	deg
Weight	100	g
CRI	85	
Body / Finish Color	Aluminum	
Life Time	50,000	hours

Warning:

- * Do not look permanently to the light sources.
- * Specified performance measured in AC/DC 12V.

