


WG-15 Series

Ordering Informations

Model no.	Color	Size	Light Source	Luminous Intensity
WG-15WW1	Warm White (3,000-3,500K)	47x47x1000mm	15x1W	1,400-1,500lm
WG-15NW1	Natural White (4,000-4,500K)	47x47x1000mm	15x1W	1,500-1,600lm
WG-15WE1	Cool White (6,000-6,500K)	47x47x1000mm	15x1W	1,500-1,600lm

Outline Drawing



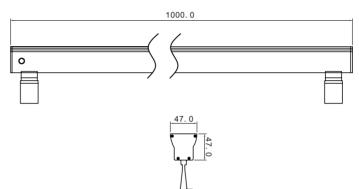

Features

- Aluminum casing with special extrusions design
- Energy saving
- Eco-friendly product
- Long life time
- High luminance
- Low power consumption
- RoHS compliant
- Low surface heat against hand touch
- No UV or IR damage light sensitive items
- Highly efficient heat release mechanism

Unit: mm

Specifications

Parameter	Rating value	
Power Consumption	15W	
Input Voltage	AC 90-220V, 50/60Hz	
Light Source	15x1W power LED	
Operating Temperature	- 40 to +70°C	
Beam Angle	45°	
Weight	2.5kg	
CRI	85	
IP level	IP65	
Body / Finish Color	Die-cast Aluminium casing	

Warning:

- * Do not look permanently to the light sources.
- * Specified performance measured in AC 90-220V, 50/60Hz



^{*} The dimensional outline drawings are common in (WG-15WE1 & WG-15NW1 & WG-15WW1)